

Plastic cylindrical shape photoelectric sensors **PR12S** series



Features

- ◆ Diffuse reflection working principle;
- ◆ Excellent anti-interference performance
- ◆ High detection accuracy




Part number

NPN NO	PR12S-BC15DNO-E2	PNP NO	PR12S-BC15DPO-E2
NPN NC	PR12S-BC15DNC-E2	PNP NC	PR12S-BC15DPC-E2
NPN NO+NC	PR12S-BC15DNR-E2	PNP NO+NC	PR12S-BC15DPR-E2


Technical specifications

Detection type	Diffuse reflection	Consumption current	≤25mA
Rated distance [Sn]	15cm (adjustable)	Circuit protection	Short-circuit, overload and reverse polarity
Standard target	White card reflection rate 90%	Response time	< 8.2ms
Light source	Infrared LED (880nm)	Output indicator	Yellow LED
Dimensions	M12*65mm	Ambient temperature	-15°C...+55°C
Output	NO/NC (depends on part No.)	Ambient humidity	35-85%RH (non-condensing)
Supply voltage	10...30 VDC	Voltage withstand	1000V/AC 50/60Hz 60s
Target	Opaque object	Insulation resistance	≥50MΩ(500VDC)
Hysteresis range [%/Sr]	3...20%	Vibration resistance	10...50Hz (0.5mm)
Repeat accuracy [R]	≤5%	Degree of protection	IP67
Load current	≤200mA	Housing material	PBT
Residual voltage	≤2.5V	Connection type	M12 Connector


Dimensions

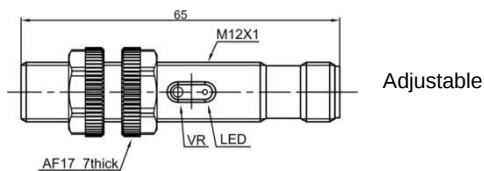


Wiring diagram




NPN NO




PNP NO




NPN NC



PNP NC



NPN NO+NC



PNP NO+NC

