

Plastic square shape inductive sensors **LE68** series



Features

- ◆ Non contact detection, safe and reliable;
- ◆ ASIC design;
- ◆ Perfect choice for metallic targets detection;




Part number

NPN NO	LE68SF15DNO-E2	LE68SN25DNO-E2	PNP NO	LE68SF15DPO-E2	LE68SN25DPO-E2
NPN NC	LE68SF15DNC-E2	LE68SN25DNC-E2	PNP NC	LE68SF15DPC-E2	LE68SN25DPC-E2
NPN NO+NC	LE68SF15DNR-E2	LE68SN25DNR-E2	PNP NO+NC	LE68SF15DPR-E2	LE68SN25DPR-E2

Technical specifications

Mounting	Flush	Non-flush	Current consumption	≤10mA	
Rated distance [Sn]	15mm	25mm	Circuit protection	Short-circuit, overload and reverse polarity	
Assured distance [Sa]	0...12mm	0...20mm	Output indicator	Yellow LED	
Dimensions	20 *40 *68mm		Ambient temperature	-25°C...70°C	
Output	NO/NC (depends on part number)		Ambient humidity	35-95%RH	
Supply voltage	10...30 VDC		Switching frequency [F]	500 Hz	300Hz
Standard target	Fe 45*45*1t	Fe 75*75*1t	Voltage withstand	1000V/AC 50/60Hz 60s	
Switch-point drifts [%/Sr]	≤ ±10%		Insulation resistance	≥50MΩ(500VDC)	
Hysteresis range [%/Sr]	1...20%		Vibration resistance	10...50Hz (1.5mm)	
Repeat accuracy [R]	≤3%		Degree of protection	IP67	
Load current	≤200mA		Housing material	PBT	
Residual voltage	≤2.5V		Connection type	M12 connector	

Dimensions

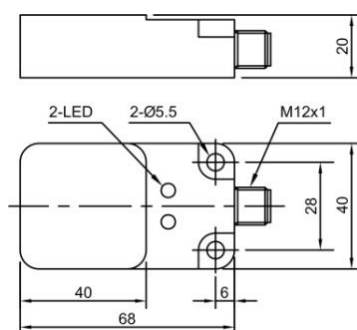

Wiring diagram

