

Metal cylindrical shape inductive sensors **LR08** series


Features

- ◆ Extended sensing distance;
- ◆ ASIC design, safe and reliable;
- ◆ Perfect choice for metallic target detection;




Part number

NPN NO	LR08BF02DNOY	LR08BN04DNOY	PNP NO	LR08BF02DPOY	LR08BN04DPOY
NPN NC	LR08BF02DNCY	LR08BN04DNCY	PNP NC	LR08BF02DPCY	LR08BN04DPCY

Technical specifications

Mounting	Quasi-flush	Non-flush	Current consumption	≤10mA	
Rated distance [Sn]	2mm	4mm	Circuit protection	Short-circuit, overload and reverse polarity	
Assured distance [Sa]	0...1.6mm/0...3.2mm		Output indicator	YellowLED	
Dimensions	M8*40mm	M8*43mm	Ambient temperature	-25°C...70°C	
Output	NO/NC(depends on part number)		Ambient humidity	35-95%RH	
Supply voltage	10...30 VDC		Switching frequency [F]	1500Hz	1000Hz
Standard target	Fe 8*8*1t/Fe12*12*1t		Voltage withstand	
Switch-point drifts[%/Sr]	≤ ±10%		Insulation resistance	≥50MΩ (500VDC)	
Hysteresis range [%/Sr]	1...20%		Vibration resistance	10...50Hz (1.5mm)	
Repeat accuracy [R]	≤3%		Degree of protection	IP67	
Load current	≤150mA		Housing material	Stainless steel	
Residual voltage	≤2.5V		Connection type	2m PVC cable	

Dimensions

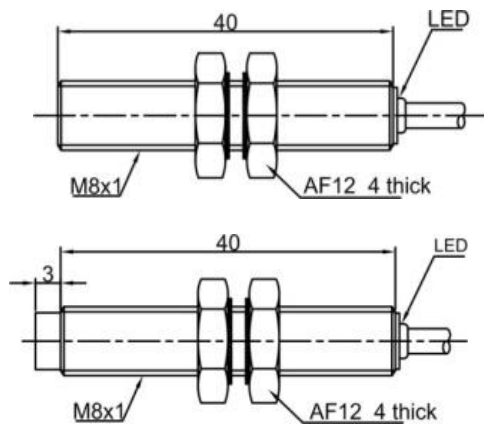

Wiring diagram

