

Metal cylindrical shape inductive sensors **LR18X** series



Features

- ◆ Special compensating circuit design,;
- ◆ Wider tempature range -40~+70°C;
- ◆ Perfect choice for Cryogenic system, outdoor condition etc




Part number

NPN NO	LR18XBF05DNOW1-E2	LR18XBN08DNOW1-E2	PNP NO	LR18XBF05DPOW1-E2	LR18XBN08DPOW1-E2
NPN NC	LR18XBF05DNCW1-E2	LR18XBN08DNCW1-E2	PNP NC	LR18XBF05DPCW1-E2	LR18XBN08DPCW1-E2

Technical specifications

Mounting	Flush	Non-flush	Current consumption	≤15mA
Rated distance [Sn]	5mm	8mm	Circuit protection	Short-circuit, overload and reverse polarity
Assured distance [Sa]	0...4mm	0...6.4mm	Output indicator	Yellow LED
Dimensions	M18*63mm	M18*71mm	Ambient temperature	-40°C...70°C
Output	NO/NC(depends on part number)		Ambient humidity	35...95%RH
Supply voltage	10...30 VDC		Switching frequency [F]	1000 Hz 800 Hz
Standard target	Fe 18*18*1t	Fe 24*24*1t	Voltage withstand	1000V/AC 50/60Hz 60s
Switch-point drifts[%/Sr]	≤±10%		Insulation resistance	≥50MΩ(500VDC)
Hysteresis range [%/Sr]	1...20%		Vibration resistance	10...50Hz (1.5mm)
Repeat accuracy [R]	≤3%		Degree of protection	IP67
Load current	≤200mA		Housing material	Nickel-copper alloy
Residual voltage	≤2.5V		Connection type	M12 connector

Dimensions

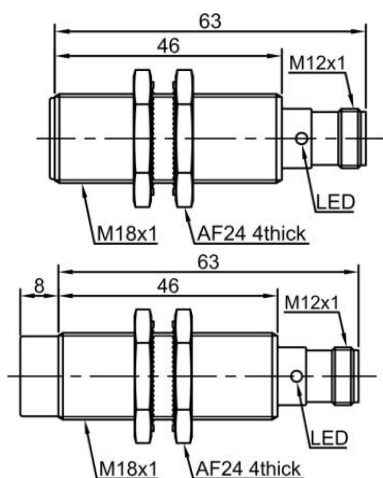

Wiring diagram

