

Standard function type inductive sensors **LR30X** series



Features

- ◆ Non contact detection, safe and reliable;
- ◆ ASIC design;
- ◆ Perfect choice for metallic target detection;




Part number

AC 2 wires NO	LR30XCF10ATO-E2	LR30XCN15ATO-E2	AC 2 wires NC	LR30XCF10ATC-E2	LR30XCN15ATC-E2
---------------	-----------------	-----------------	---------------	-----------------	-----------------

Technical specifications

Mounting	Flush	Non-flush	Leakage current [Ir]	≤3mA
Rated distance [Sn]	10mm	15mm	Circuit protection	...
Assured distance [Sa]	0...8mm	0...12mm	Output indicator	Yellow LED
Dimensions	M30*73mm	M30*85 mm	Ambient temperature	-25°C...70°C
Output	NO/NC(depends on part number)		Ambient humidity	35-95%RH
Supply voltage	20...250 VAC		Switching frequency [F]	20 Hz 20 Hz
Standard target	Fe 30*30*1t	Fe 45*45*1t	Voltage withstand	1000V/AC 50/60Hz 60S
Switch-point drifts [%/Sr]	≤ ± 10%		Insulation resistance	≥50MΩ (500VDC)
Hysteresis range [%/Sr]	1...20%		Vibration resistance	10...50Hz (1.5mm)
Repeat accuracy [R]	≤ 3%		Degree of protection	IP67
Load current	≤ 300mA		Housing material	Nickel-copper alloy
Residual voltage	≤ 10V		Connection type	M12 connector

Dimensions

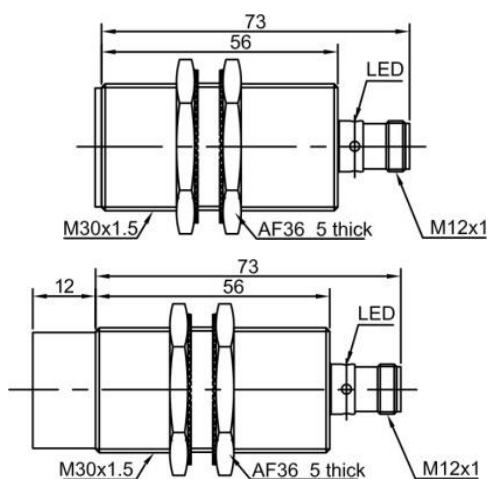

Wiring diagram

