

## Plastic cylindrical shape capacitive sensors **CR18S** series



### Features

- ◆ Be able to detect both metal and nonmetal objects;
- ◆ Be able to detect various media via nonmetallic container;
- ◆ Reliable liquid level detecting;


### Part number

NPN NO	CR18SCF05DNO	CR18SCN08DNO	PNP NO	CR18SCF05DPO	CR18SCN08DPO
NPN NC	CR18SCF05DNC	CR18SCN08DNC	PNP NC	CR18SCF05DPC	CR18SCN08DPC
NPN NO+NC	CR18SCF05DNR	CR18SCN08DNR	PNP NO+NC	CR18SCF05DPR	CR18SCN08DPR

### Technical specifications

Mounting	Flush	Non-flush	Consumption current	≤15mA
Rated distance [Sn]	5mm (adjustable)	8mm (adjustable)	Circuit protection	Short-circuit, overload and reverse polarity
Assured distance [Sa]	0...4mm	0...6.4mm	Output indicator	Yellow LED
Dimensions	M18*70mm	M18*78 mm	Ambient temperature	-25°C...70°C
Output	NO/NC(depends on part number)		Ambient humidity	35-95%RH
Supply voltage	10...30 VDC		Switching frequency [F]	50 Hz
Standard target	Fe18*18*1t	Fe 24*24*1t	Voltage withstand	1000V/AC 50/60Hz 60S
Switch-point drifts [%/Sr]	≤±20%		Insulation resistance	≥50MΩ (500VDC)
Hysteresis range [%/Sr]	3...20%		Vibration resistance	10...50Hz (1.5mm)
Repeat accuracy [R]	≤3%		Degree of protection	IP67
Load current	≤200mA		Housing material	PBT
Residual voltage	≤2.5V		Connection type	2m PVC cable

### Dimensions

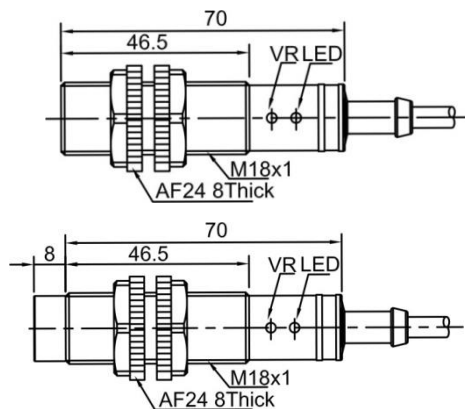

### Wiring diagram

