

Metal cylindrical shape capacitive sensors **CR30** series



Features

- ◆ Be able to detect both metal and nonmetal objects;
- ◆ Be able to detect various media via nonmetallic container;
- ◆ Reliable liquid level detecting;


Part number

AC2 wires NO	CR30CF10ATO	CR30CN15ATO	AC2 wires NC	CR30CF10ATC	CR30CN15ATC
--------------	-------------	-------------	--------------	-------------	-------------

Technical specifications

Mounting	Flush	Non-flush	Leakage current [I <sub>r</sub> ]	≤3mA
Rated distance [S <sub>n</sub> ]	10mm (adjustable)	15mm(adjustable)	Circuit protection	... ..
Assured distance [S <sub>a</sub> ]	0...8mm	0...12mm	Output indicator	Yellow LED
Dimensions	M30*62mm	M30*74 mm	Ambient temperature	-25°C...70°C
Output	NO/NC(depends on part number)		Ambient humidity	35-95%RH
Supply voltage	20...250 VAC		Switching frequency [F]	15 Hz
Standard target	Fe 30*30*1t	Fe 45*45*1t	Voltage withstand	2000V/AC 50/60Hz 60S
Switch-point drifts [%/Sr]	≤±20%		Insulation resistance	≥50MΩ (500VDC)
Hysteresis range [%/Sr]	3...20%		Vibration resistance	10...50Hz (1.5mm)
Repeat accuracy [R]	≤3%		Degree of protection	IP67
Load current	≤300mA		Housing material	Nick-copper alloy
Residual voltage	≤10V		Connection type	2m PVC cable

Dimensions

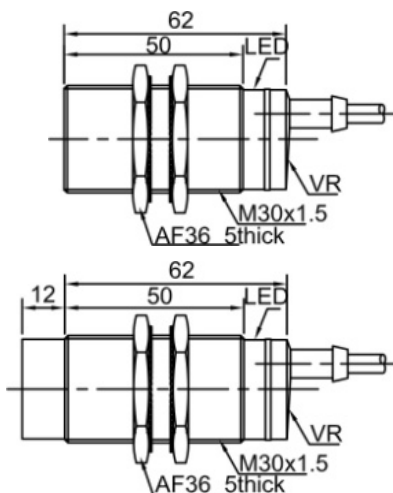

Wiring diagram

