

Metal cylindricalshape inductive sensors **LR12X** series


Features

- ◆ Extended sensing distance;
- ◆ ASIC design, safe and reliable;
- ◆ Perfect choice for metallic target detection;




Part number

AC 2 wiresNO	LR12XCF04ATOY-E2	LR12XCN08ATOY-E2	AC 2 wiresNC	LR12XCF04ATCY-E2	LR12XCN08ATCY-E2
--------------	------------------	------------------	--------------	------------------	------------------

Technical specifications

Mounting	Quasi -flush Non-flush	Leakage current [Ir]	≤3mA
Rated distance [Sn]	4mm 8mm	Circuit protection
Assured distance [Sa]	0...3.2mm0...6.4mm	Output indicator	Yellow LED
Dimensions	M12 *73mmM12 *81mm	Ambient temperature	-25°C...70°C
Output	NO/NC(depends on part number)	Ambient humidity	35...95%RH
Supply voltage	20...250 VAC	Switching frequency [F]	20 Hz
Standard target	Fe 12*12*1t Fe 24*24*1t	Voltage withstand	1000V/AC 50/60Hz 60S
Switch-point drifts[%/Sr]	≤ ± 10%	Insulation resistance	≥50MΩ (500VDC)
Hysteresis range [%/Sr]	1...20%	Vibration resistance	10...50Hz (1.5mm)
Repeat accuracy [R]	≤3%	Degree of protection	IP67
Load current	≤200mA	Housing material	Nickel-copper alloy
Residual voltage	≤10V	Connection type	M12 connector

Dimensions

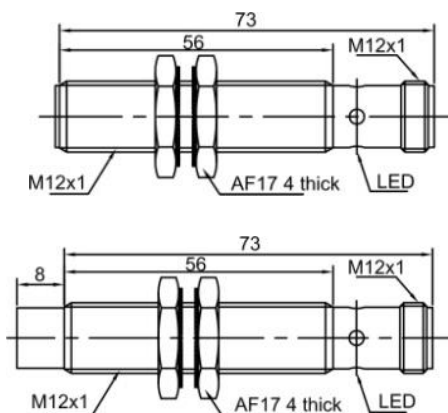

Wiring diagram

