

Metal cylindrical shape inductive sensors **LR12X** series


Features

- ◆ Special compensating circuit design,;
- ◆ Wider tempature range -25~+120°C;
- ◆ Perfect choice for metal casting and glass industry etc;




Part number

NPN NO	LR12XBF02DNOW-E2	LR12XBN04DNOW-E2	PNP NO	LR12XBF02DPOW-E2	LR12XBN04DPOW-E2
NPN NC	LR12XBF02DNCW-E2	LR12XBN04DNCW-E2	PNP NC	LR12XBF02DPCW-E2	LR12XBN04DPCW-E2

Technical specifications

Mounting	Flush	Non-flush	Current consumption	≤15mA
Rated distance [Sn]	2mm	4mm	Circuit protection	Reverse polarity
Assured distance [Sa]	0...1.6mm0...3.2mm		Output indicator
Dimensions	M12*63mm	M12*67mm	Ambient temperature	-25°C...+120°C
Output	NO/NC(depends on part number)		Ambient humidity	35...95%RH
Supply voltage	10...30 VDC		Switching frequency [F]	1500 Hz 1000 Hz
Standard target	Fe 12*12*1t	Fe12*12*1t	Voltage withstand	1000V/AC 50/60Hz 60s
Switch-point drifts[%/Sr]	≤±10%		Insulation resistance	≥50MΩ(500VDC)
Hysteresis range [%/Sr]	1...20%		Vibration resistance	10...50Hz (1.5mm)
Repeat accuracy [R]	≤5%		Degree of protection	IP67
Load current	≤100mA		Housing material	Nickel-copper alloy
Residual voltage	≤2.5V		Connection type	M12 connector

Dimensions

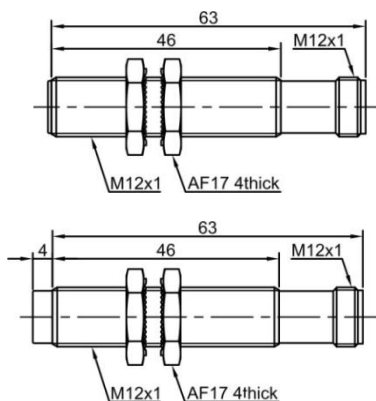

Wiring diagram

