

## Digital display laser distance measuring sensor PDA series



### Feature description

- Exquisite appearance and light aluminum housing, easy to mount and dismount
- Convenient operation panel with visualized OLED display to complete all function settings fastly
- Small diameter light spot to accurately measure very tiny objects
- Key or remote teach-in to easily set response time for different applications
- Powerful function setting and flexible output way
- Complete shielded design, stronger anti-interference performance
- IP67 protection degree, able to work in water or dusty environment



### Model specification

RS-485	PDA-CC10DGR	4...20mA	PDA-CC10TGI
--------	-------------	----------	-------------


### Specifications

Measuring range	30...100mm	Temperature drift	±0.02%F.S./°C
Supply voltage	RS-485:10...30VDC;4...20mA:12...24VDC	Indicator	Power indicator:Green LED;Action indicator:Yellow LED
Consumption power	≤700mW		Alarm indicator:Yellow LED
Load current	200mA	Protection circuit④	Short circuit,reverse polarity,overload protection
Voltage drop	<2.5V	Built-in function⑤	Slave address & Port rate setting ;Average setting;Product self-check
Light source	Red laser(650nm);Laser level:Class 2		Analog map settings;Output setting;Restore factory settings
Light spot	1mm*3mm@100mm		Single point teach;Window teach;Parameter query
Resolution	5um@30mm;50um@100mm	Service environment	Operation temperature:-10...+50°C
Linear accuracy①②	RS-485:±0.3%F.S.;4...20mA:±0.4%F.S.		Storage temperature:-20...+70°C
Repeat accuracy①②③	10um@30mm;30um@50mm;100um@100mm		Ambient temperature:35...85%RH(No condensation)
Output1	RS-485(Support Modbus protocol)	Anti ambient light	Incandescent light: < 3,000lux
	4...20mA(Load resistance < 390Ω)	Protection degree	IP67
Output2	PUSH-PULL/NPN/PNP And NO/NC Settable	Material	Housing:Aluminum;Lens cover:PMMA;Display panel: PC
Distance setting	RS-485:Keypress/RS-485 setting	Vibration resistance	10...55Hz Double amplitude1mm,2H each in X,Y,Z directions
	4...20mA:Keypress setting	Impulse resistance	500m/s²(About 50G)3 times each in X,Y,Z directions
Response time	2ms/16ms/40ms Settable	Connection way	RS-485:2m 5pins PVC cable;4...20mA:2m 4pins PVC cable
Dimension	65*51*23mm	Accessory	Screw(M4×35mm)×2、Nut×2、Washer×2、Mounting bracket、Operation manual
Display	OLED Display(size:14*10.7mm)		


#### Remark:

- ①Test conditions:Standard data at 23 ± 5 °C ;Supply voltage 24VDC;30 minutes' warmup before test;Sampling period 2ms;Average sampling times 100;Standard sensing object 90% white card
- ②The statistical data follows the 3σ criteria
- ③Repeat accuracy:23 ± 5 °C environment,90% reflectivity white card,100 test data results
- ④Slave address,baud rate setting only for RS-485 series
- ⑤Protecion circuit only for switch output
- ⑥Product operation steps and precautions in "Operation manual"


## Dimension

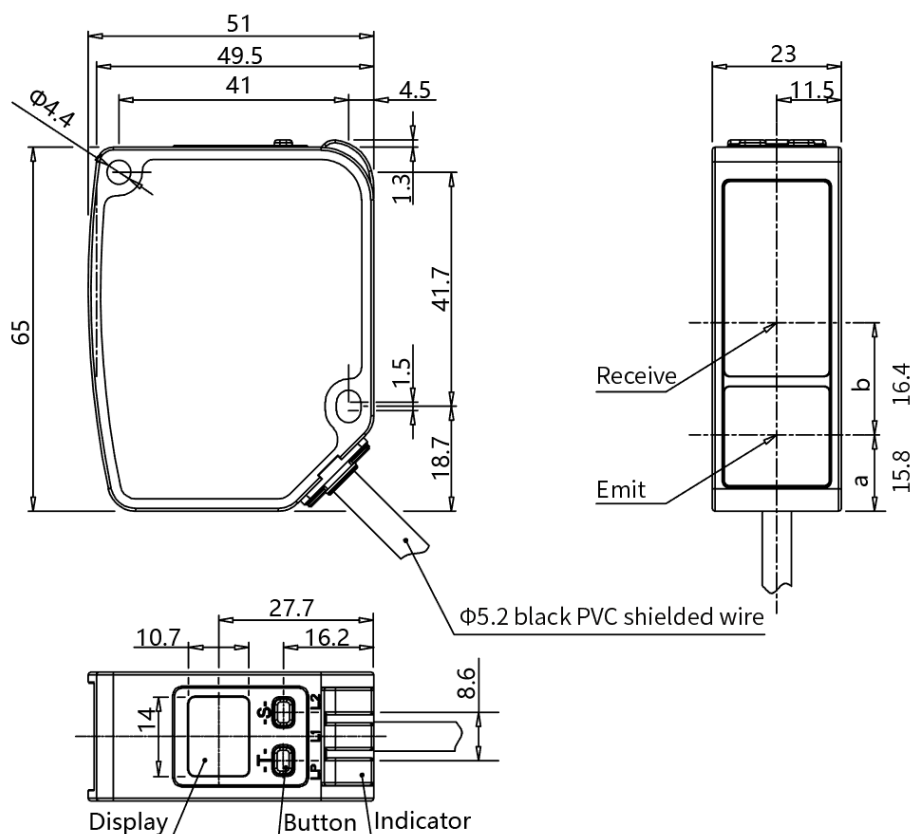

## Wiring diagram



Serial communication RS-485



Analog output 4...20mA

Remark:  
The sensors are equipped with shielded cables, Q is the switch output.