

## Metal cylindrical shape photoelectric sensors PR30S series



### Features

- ◆ Through beam reflection working principle;
- ◆ Excellent anti-interference performance
- ◆ High detection accuracy




### Part number

		Emitter		Receiver				Emitter		Receiver	
AC 2 wires	NO	PR30S-TM20A-E2	PR30S-TM20ATO-E2	AC 2 wires	NC	PR30S-TM20A-E2	PR30S-TM20ATC-E2				

### Technical specifications

Detection type	Through beam	Consumption current	≤3mA(receiver)
Rated distance [Sn]	20m (non-adjustable)	Circuit protection	.....
Standard target	>φ15mm opaque object	Response time	<50ms
Light source	Infrared LED (880nm)	Output indicator	Emitter: Green LED Receiver: Yellow LED
Dimensions	M30*90mm	Ambient temperature	-15℃...+55℃
Output	NO/NC (depends on receiver)	Ambient humidity	35-85%RH (non-condensing)
Supply voltage	20...250 VAC	Voltage withstand	2000V/AC 50/60Hz 60s
Min target	.....	Insulation resistance	≥50MΩ(500VDC)
Hysteresis range [%/Sr]	.....	Vibration resistance	10...50Hz (0.5mm)
Repeat accuracy [R]	≤5%	Degree of protection	IP67
Load current	≤300mA (receiver)	Housing material	PBT
Residual voltage	≤10V (receiver)	Connection type	M12 Connector

### Dimensions

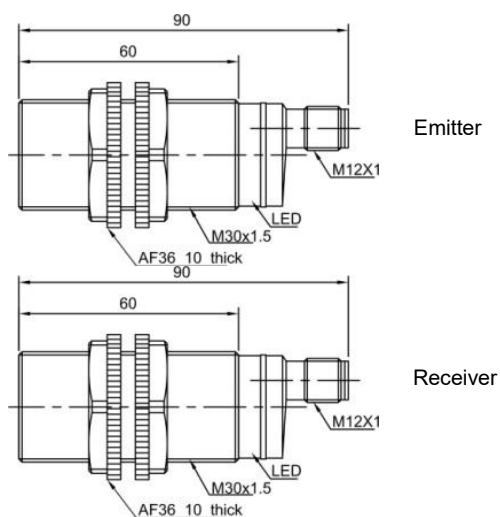

### Wiring diagram

