

Ultrasonic sensor **UR30-CM2/3** series

**Feature Description**

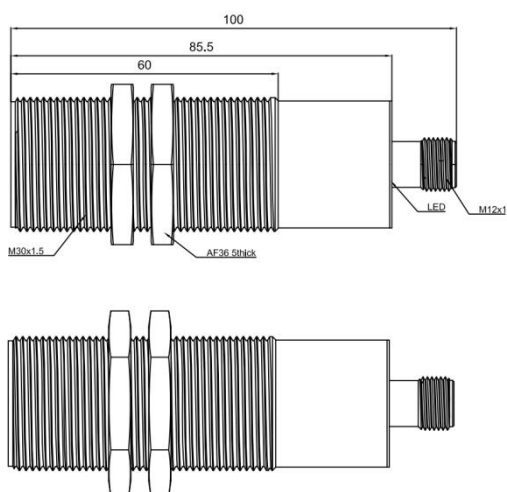
- ◆ M30 installation threaded sleeve
- ◆ Extended long distance detection
- ◆ 1 NPN or PNP switch output
- ◆ Analog voltage output 0-5/10V or analog current output 4-20mA
- ◆ Digital TTL output
- ◆ Output can be changed through serial port upgrade
- ◆ Setting detection distance through teach-in lines
- ◆ Temperature compensation

**Model specifications**

NPN NO/NC	UR30-CM2DNB-E2	UR30-CM3DNB-E2	PNP NO/NC	UR30-CM2DPB-E2	UR30-CM3DPB-E2
NPN Hysteresis mode	UR30-CM2DNH-E2	UR30-CM3DNH-E2	PNP Hysteresis mode	UR30-CM2DPH-E2	UR30-CM3DPH-E2
0-5V Analog output	UR30-CM2DU5-E2	UR30-CM3DU5-E2	4-20mA Analog output	UR30-CM2DI-E2	UR30-CM3DI-E2
0-10V Analog output	UR30-CM2DU10-E2	UR30-CM3DU10-E2	Com TTL232	UR30-CM2DT-E2	UR30-CM3DT-E2

**Specifications**

Sensing range	180-2000mm	180-3000mm	Indication	LED red light: No target detected in teach-in state, always on
Blind area	0-180mm			LED yellow light: In normal working mode, the switch status
Resolution ratio	1mm			LED blue light: Target detected in teach-in state, flashing
Repeat accuracy	±0.15% of full scale value			LED green light: Power indicator light, always on
Absolute accuracy	±1% (temperature drift compensation)		Input type	With teach-in function
Response time	100ms	110ms	Ambient temperature	-25°C...70°C(248-343K)
Switch hysteresis	2mm		Storage temperature	-40°C...85°C(233-358K)
Switching frequency	10Hz		Characteristics	Support serial port upgrade and change the output type
Power on delay	<500ms		Material	Copper nickel plating, plastic accessory
Working voltage	15...30VDC		Protection degree	IP67
No-load current	≤25mA		Connection	4 pin M12 connector

**Dimension**

**Wiring diagram**
